


公差等级/General	Tolerances(mm)										0.1/10													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	±Z											
3	~	~	~	~	~	~	~	~	~	~	~	>500												
6	~	10	~	18	~	30	~	50	~	80	~	120	~	180	~	250	~	315	~	400	~	500	~	1.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±Z											

PCB LAYOUT

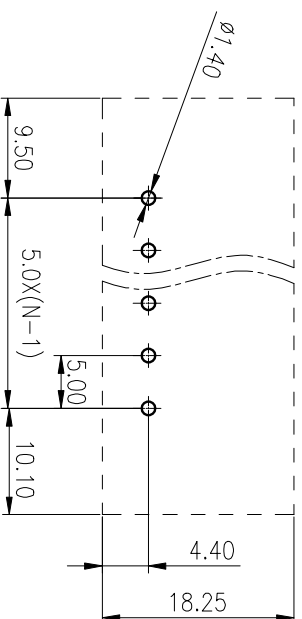

Bending the pin-header after assembling

ITEM	NAME OF PART	MATERIAL	NOTES
6	Right housing	PA66	UL94V-0
5	Clamp	Copper alloy	Sn plated
4	Left housing	PA66	UL94V-0
3	Housing2	PA66	UL94V-0
2	Side housing	PA66	UL94V-0
1	Housing1	PA66	UL94V-0

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 / IEC Standard:			
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III / 3	III / 2	II / 2
额定电压/电涌 / Rated Voltage(V)/Current(A)	320/20	/	/
额定冲击电压 / Rate Impulse Voltage(KV)	4.0	/	/
线径范围(硬线和软线) / Wire Range(rigid and flexible)(mm² / AWG)	/		
间距 / Pitch(mm) / 线径范围 / Poles	5.0 / N=02~24P		
剥线长度 / Stripping length(mm)	6~7		
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合 RoHS 环保要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	PANTONE 428C		
PANTONE / RAL	PANTONE 428C		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRT: WangY1 2020.06.17

DRAWING NO.: 8EDGAM-5.0-C02

TYPE: CUSTOMER DRAWING

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

8EDGAM-5.0-XXP-11-01A(H)

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				
4				
5				
6				