


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

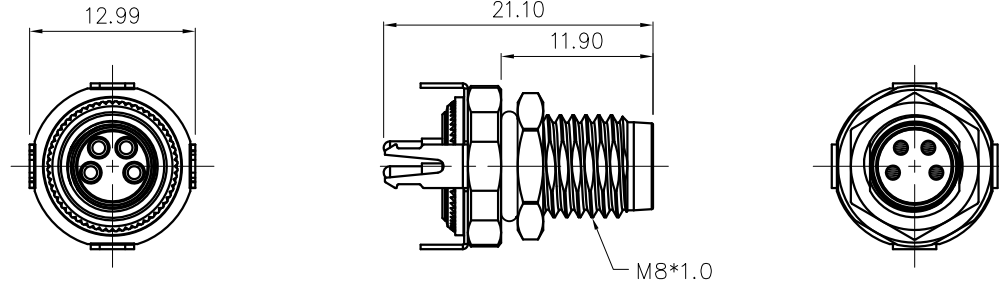

SPSH-M8A-XXP-MM-SF7003-00A(H)


Pin number:03,04

NOTES:

- Rated voltage/current : 3pin:60V / 3A
4pin:60V / 3A
- Withstanding voltage : 3,4pin:AC850V/1Min
- Levels of protection:IP67
- Wire connection mode:soldering(PCB)
- Operating temperature:-40°C~+105°C
- For Panel Thinkness Range: 2.0~3.0mm
- For PCB Thinkness Max: 1.6mm
- RoHS Compliance
- Tolerance :


.X	±0.25mm
.XX	±0.1mm
∠	±1°

3pin A Coding




Pin Assignment Front View


4pin A Coding




Pin Assignment Front View



PCB layout



PCB layout



Panel cut

DETACHED LISTS	PART NO.: SPSHM8AXXPMMSF700300AH		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	NAME: SPSH-M8A-XXP-MM-SF7003-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV	SHEET	1/1
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SCALE	1:1
		DO NOT SCALE DRAWING		