


型号说明

RM-EBBM-2003-M-L300-00A(H)

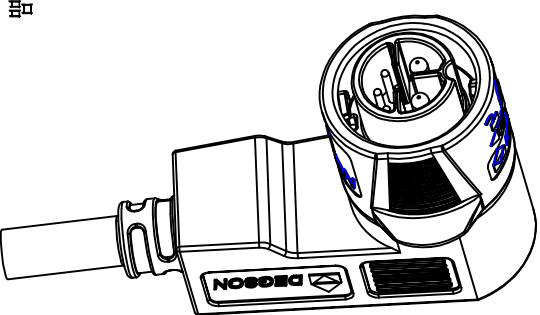

弯插头
包塑式
系列名称
产品插针数量
功率针2pin,
PE针1pin,
信号针5pin
公端
线长300mm
通用型环保产品

未注公差/General tolerances(mm)												
0	>3	>6	>1	>1	>3	>5	>8	>1	>2	>31	>4	0.2/10
~	~	~	~	~	~	~	~	~	~	~	~	
3	6	10	18	30	50	80	120	180	25	5	0	±2
~	~	~	~	~	~	~	~	~	~	~	~	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.95	±1.15	±1.60	±2.00	

额定电压/Rated Voltage	80V/20A
绝缘电阻/Insulation resistance	≥100MΩ
插拔次数/Mechanical working life(cycling)	3000
耐电压/Withstanding voltage	500V AC
使用温度范围/Operating temperature(°C)	-40~+85
防水等级/Levels of protection	IP67 (mated)
接线方式/Terminal	Soldering
导线外径范围/Wire range(mm)	6-1~7-8

SURFACE: /

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: RM-EBBM-2003-M-L300-00A(H)

MATERIAL: /	APPD: /	CHKD: /	DRT: Huangju 2021.8.20	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	REV: T0
MAT NO.: /	STATUS: /	APPT: /	DRAWING NO.: /	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	REV: T0
DESCRIPTION: AO	DRKT: XX	20MMXXX	XX	XX	XX	XX	1/1

REV: T0	ECN: /	DESCRIPTION: AO	DRKT: XX	20MMXXX	XX	XX	1/1
---------	--------	-----------------	----------	---------	----	----	-----