
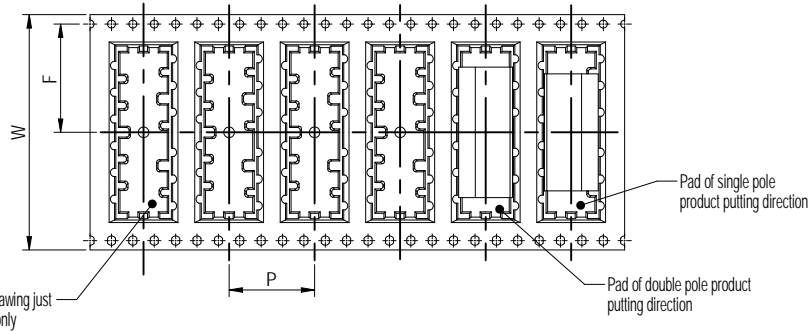


公差/General tolerances (mm)											D 0.1/10 ±2		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50






Reel Name	POLE	Width/W	Pitch/P	Width/F	Width/Bo	Qty. pre reel	Reel qty. per carton	Qty. per carton
15EDGRC-THR-2.5-REEL(44)	2~12	44mm	16mm	20.3mm	32.3mm	330	6	1980

SCALE: 1:1

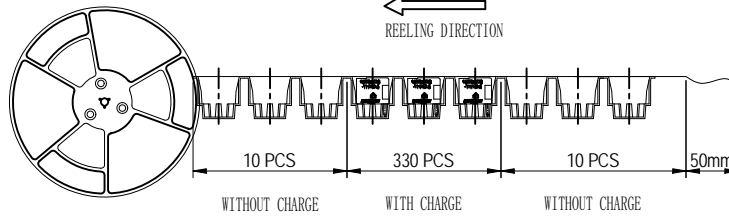

The reel drawing just reference only

PCB LAYOUT

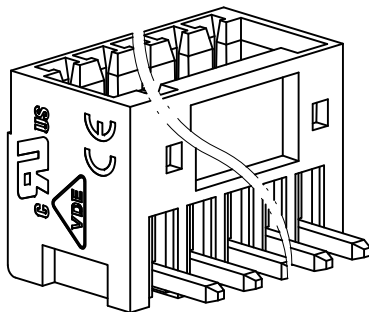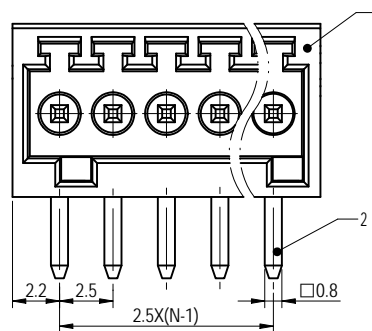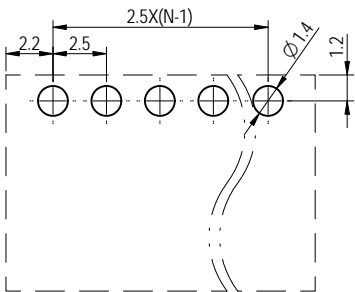

Note:  
The A&Z(H) in the name means: A(H) and Z(H).

2	Pin	Copper	Sn Plated	
1	Housing	Thermoplastic	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		150/4	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	IV/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	250/5
额定脉冲电压/Rate Impulse Voltage(KV)		/	/	2.5
间距/Pitch(mm)/线数范围/Poles		2.5/N=02~12P		
使用温度范围/Operating temperature(°C)		-40~+130		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number: PANTONE / RAL		/		

<b>DEGSON</b>		MATERIAL:		SURFACE/COLOR:	
APPD: 兰春华	2023.03.17	NAME:		MAT STATUS: 批量	
CHKD: 袁耀志	2023.03.17	MAT NO./REV: - / 00		15EDGRC-THR-2.5-XXP-1Y-00A&Z(H)	
DRFT: 方哲盛	2023.03.16	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
A3		200019910	CUSTOMER DRAWING	已发布	1:1
REV	ECN	DESCRIPTION	DRFT	DATE	SHEET
00			方哲盛	2023.03.16	1/1