

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交易本文件的内容。未经许可擅自涉及发明、实用新型和外观设计的所有权利。

Dimensional tolerance(mm)					Length tolerance(mm)					0.10/10 ±2°
0~30	>30~60	>60~100	>100~150	>150	0~50	50~150	150~300	300~1000	>1000	
±0.25	±0.35	±0.55	±0.80	±1.10	±6	±11	±16	±26	±36	
额定电压电流/Rated Voltage/Current									250V/1.5A	
使用温度范围/Operating temperature(°C)									-40~+85	
防水等级/Levels of protection									IP67(Mating)	
剥线长度									外剥25mm, 内剥12mm	
适用线缆OD									5.0~6.0	
盐雾试验/Salt spray test									48H 无红锈	
符合RoHS环保要求/Conform to RoHS									Yes	



插头胶芯
母针
盖板
按钮

插头外壳

线缆橡胶塞

堵头

螺母

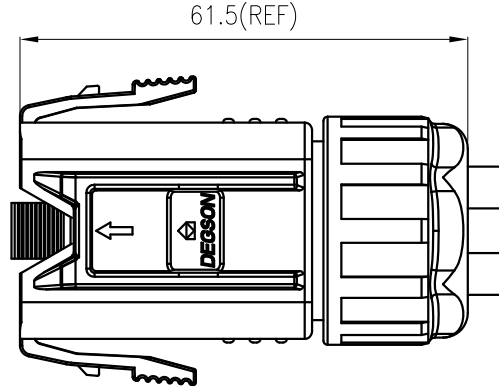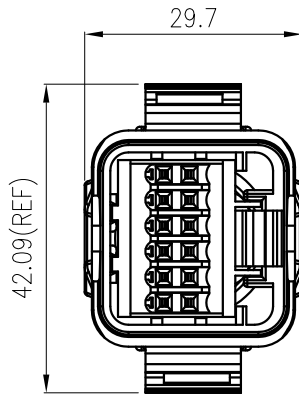

插芯夹子	磷青铜 镀锡
外壳	PC 黑色
密封圈	Silicone 黑色
密封堵头	Silicone 灰色
密封螺母	PA66+GF 黑色

MATERIAL: /		SURFACE: /								
MAT.NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD								
STATUS: /										
APPD:										
CHKD:		Description: PV-ST-MF-PSC-12P-00A(H)								
DRFT: YU JH 2023.07.18		DRAWING NO.: /								
REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET	REV	DO-3
					mm (inch)					1/1

00-3		增加盐雾	YU JH	2023.12.05
00-2		更新品名	YU JH	2023.08.16
REV	ECN	DESCRIPTION	DRFT	DATE