


02P 3D model

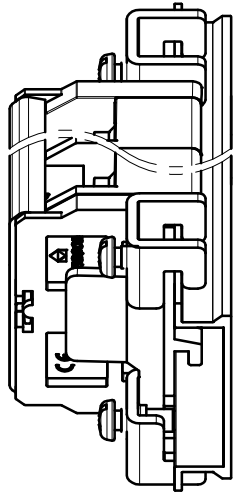

公差 (General tolerances)(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	>500
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12	±0.18	±0.22	±0.28	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2

UL 额定电压/Rated Voltage/Current 600V/20A(B)  
 UL 工频耐压/R.M.S. withstand voltage AC2200V/1Min  
 线径范围/Wire range(AWG) 24~12  
 线数范围/Poles N=01~18P  
 螺丝扭矩/Tightening torque(Nm/Lb.in) M3.5: 0.8/7.02  
 使用温度范围/Operating temperature(°C) -40~+125  
 剥线长度/Stripping length(mm) 8~9

Table1

线数	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
铝轨长 (L)	57	57	77	77	97	97	117	117	137	137	157	157	177	177	197	197	237	237
固定孔距 (S)	40	40	60	60	80	80	100	100	120	120	140	140	160	160	180	180	220	220
轨道头部 (L2)	10.55	5.80	11.05	6.30	11.55	6.80	12.05	7.30	12.55	7.80	13.05	18.30	13.55	8.80	14.05	9.30	21.50	19.80

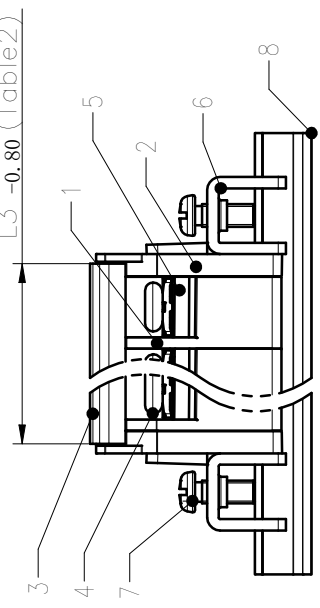


Table2

线数	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
标记条长/盖板长(L3)	13.0	22.5	32.0	41.5	51.0	60.5	70.0	79.5	89.0	98.5	108.0	117.5	127.0	136.5	146.0	155.5	165.0	174.5
对应长度用量	1/75	1/43	1/30	1/23	1/19	1/15	1/13	1/12	1/10	1/9	1/8	1/8	1/7	1/7	1/6	1/6	1/5	1/5

ITEM	NAME OF PART	MATERIAL	NOTE
9	Tag	PVC	UL94V-0
8	Rail	AL	/
7	Screw2	Steel	M3/Zn Plated
6	Fastener	SPCC	Zn Plated
5	Current carrier	Copper Alloy	Ni-Plated
4	Screw1	Steel	M3.5/Zn Plated
3	Cover	PC	UL94V-2
2	Housing2	PC	UL94V-0
1	Housing1	PC	UL94V-0

MATERIAL: SURFACE: / 00 MAT STATUS: 批量

APPD: 蓝青凡 2022.11.30  
 CHKD: 曹利彬 2022.11.30  
 DRFT: 孙科豪 2022.11.30

NAME: DGR20-XXP-1Y-10A&Z (H)  
 DRAWING NO.: 200042190  
 TYPE: CUSTOMER DRAWING  
 DRAWING STATUS: 已发布

SCALE: 2:1  
 SHEET: 1/1

Transfer or duplication of this document as well as the utilization of its contents are prohibited without express authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations.  
 非经明确授权，否则禁止转让、复制、利用、交流本文件的内容，侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。