

FOR-1755 Rev. 2.1

2





3

4

5

6

公差/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.50	±2.20	±2.50		
														±2

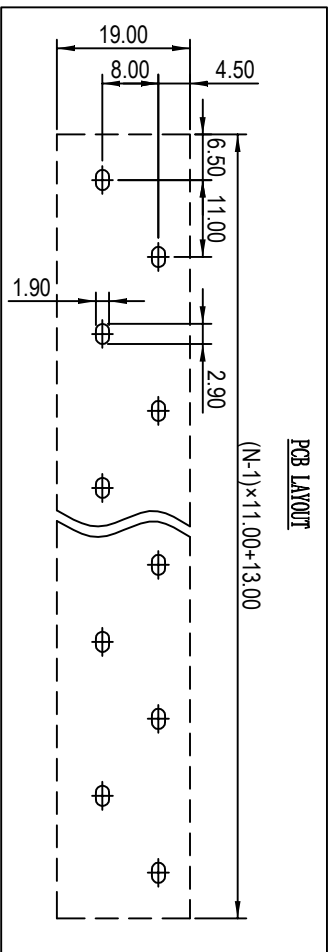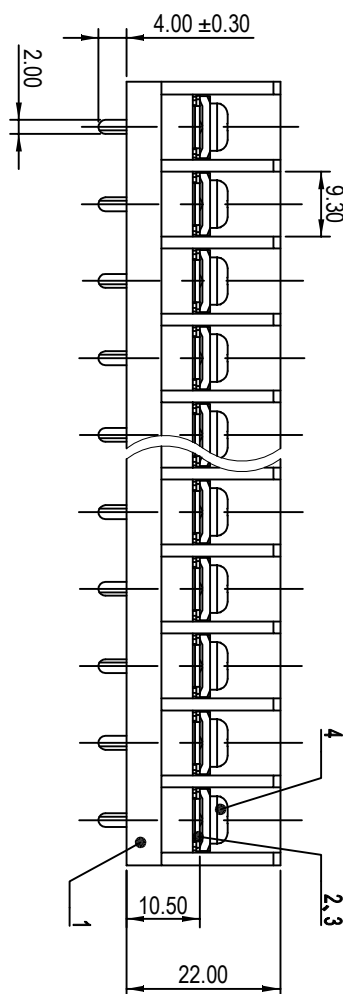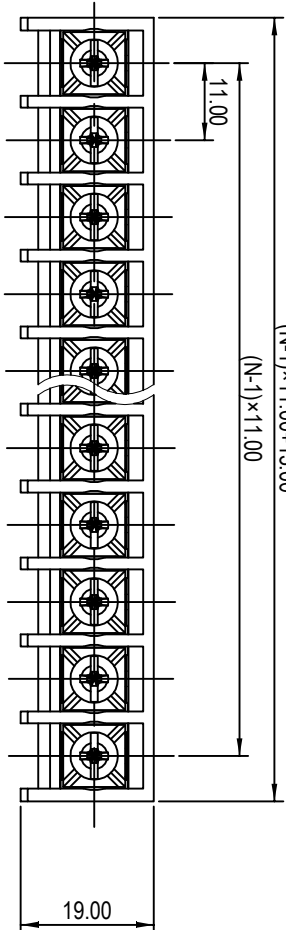

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Pin header	Copper	Sn Plated
3	Pin fastener	Steel	Ni Plated
4	Screw	Steel	Ni Plated

UL 标准/UL Standard:	
额定电压/Rated Voltage(V)	600/30
额定电流/Rated Current(A)	M4, 1.8/1.5, 9.5
拧紧扭矩/Torque Tightening(N·m/Lb·in)	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	22-10
间距/Pitch(mm)/线数范围/Poles	11.00/N -02 -25P
使用温度范围/Operating Temperature(°C)	-40~+105
符合 RoHS 环保要求/Conform to RoHS	Yes



MATERIAL:	名称
WAT NO./REV:	WAT STATUS: 数量

APPD:	NAME
CHNO:	DRAWING NO. DG66-DA-XXP-1Y-002(H)
DWGT:	TYPE CUSTOMER DRAWING
DATE:	DRAWING STATUS work
REV:	SCALE 1:1
ECN:	SHEET 1/1

DESCRIPTION	DWGT	DATE	DWGT	DATE
00	REV	00	REV	00