





未注公差/General tolerances (mm)											0.1/10 ±2'		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



4

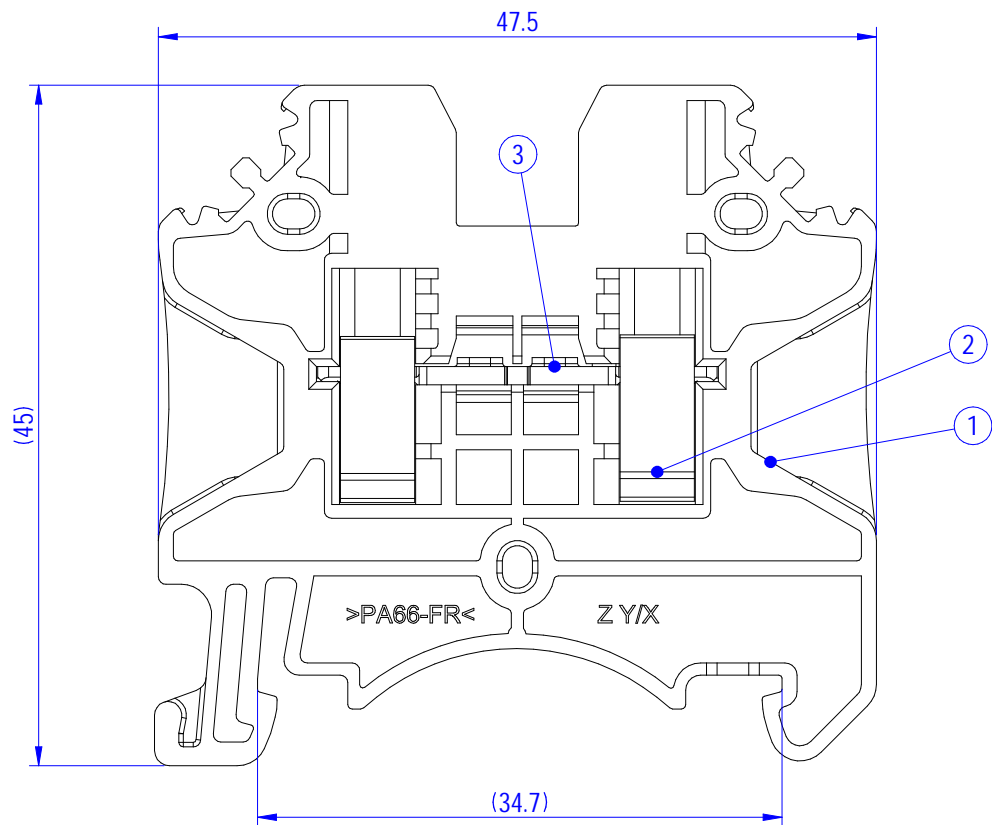

5.2

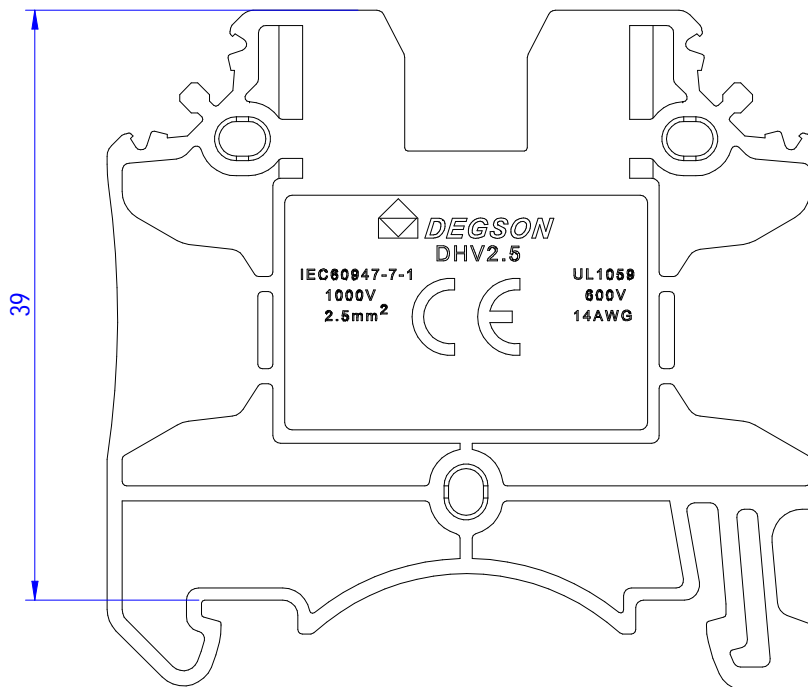

39

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Copper Alloy	M3,Ni Plated
3	Current carrier	Copper Alloy	Sn Plated
2	Cage	Copper Alloy	Ni Plated
1	Housing	PA66	UL94 V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	600/20	600/20	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	1000/24	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5~0.6/4.43~5.32		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26~14.12(SOL)0.14~2.5.4(SOL)		
间距/Pitch(mm)/线数范围/Poles	5.20/N=01P		
剥线长度/Stripping length(mm)	9~10		
使用温度范围/Operating temperature(°C)	-60~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:		SURFACE/COLOR:	
MAT NO./REV: 11010001081-1 / 01.02		MAT STATUS: 批量	
APPD: Peng M	2023.10.20	NAME	
CHKD: Gao WG	2023.10.20	DHV2.5-01P-11-00A&Z(H)	
DRFT: Liu Y	2023.10.20	DRAWING NO.	TYPE
REV	ECN	DESCRIPTION	DRAWING STATUS
03		Release drawing for MP.	已发布
			SCALE
			1:1
			SHEET
			1/1

REV	ECN	DESCRIPTION	DRFT	DATE	比例
03		Release drawing for MP.	Liu Y	2023.10.20	1:1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除经特字许可外, 未经许可, 复制或传播本文件内容, 或在本文件内容基础上进行任何形式之复制或传播, 均属于侵权行为, 本公司保留追究法律责任之权利。