


Overview

Product information

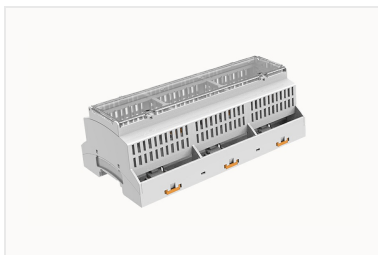

DGK12-003-13030000005

Building electronic housing ,length :161.6mm,DIN rail housing ,Can be used in distribution box comply with DIN 43880 standard , Upper housing with vent , IP class:IP20.

Product advantages

- ✓Modern design
- ✓flexible PCB connection
- ✓high-efficiency DIN rail connector is optional
- ✓Support Wall-mounted installation and distribution power box installation in accordance with DIN 43880 standards

Product certification

Technical data

Product drawing

3D model

□

Dimensions

| | |
|---------------------------------|---------|
| width | 161.6mm |
| length | 89.7mm |
| Height | 60.7mm |
| Depth from top edge of DIN rail | 54.7mm |

PCB data

| | |
|-------------------------|--------------------------------|
| Number of PCB holders | 27 (Upper cover 18+Base 9) |
| PCB thickness | 1.8mm |
| Installation location | Vertical &horizontal(DIN rail) |
| PCBType of installation | Latching |

Item properties

| | |
|---------------------------|---|
| IP class | IP20 |
| Connection levels | 1(Both sides) |
| with ventilation openings | Yes |
| Maximum connection | 96 (pitch : 2.5 mm);54 (pitch : 5 mm),36 (pitch : 7.5 mm) |

Material data

| | |
|---------------------|---|
| color | Upper housing: light gray bottom housing: black |
| Material | PC |
| Flammability rating | V2 |

Environmental data

| | |
|---|--------------|
| Ambient temperature (assembly) | -5℃ ~ +100℃ |
| Ambient temperature (operation) | -40℃ ~ +110℃ |
| Ambient temperature (storage / transport) | -40℃ ~ +70℃ |

Accessories

Accessories

| | |
|--|--|
| | |
|--|--|

Business data

| | |
|-------------------------------------|-------------|
| Order number | 13030000005 |
| Packing unit | 35 |
| Minimum order quantity | 35 |
| Products weight (without packaging) | 111.4 |